


DUAL WEDGE GATE VALVE

DUAL's Wedge Gate Valve is a medium duty general purpose Wedge Gate Valve and is highly suitable for various applications in mining, general industry, agriculture, fishing industry and for general marine applications. The Dual Wedge Gate Valve is ideal for use in controlling a wide variety of liquids and fluids. Trouble-free performance in continuous use applications ensures minimum maintenance and downtime.

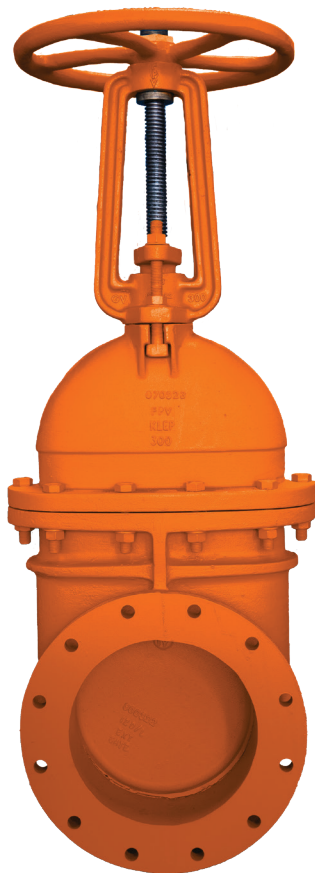

PRODUCT SPECIFICATION

SIZE RANGE: 50mm to 450mm.

BODY TYPE: Cast SG Iron or High Chrome.

PRESSURE RATINGS: PN16 and PN25.

MANUFACTURING STANDARDS: SABS 664

SPINDLE: 304 Stainless Steel.

THRUST BEARINGS: To reduce operating torque.

TESTING: All valves are tested per SABS specifications certified.

FLANGES: Flanges comply with AS, ANSI, DIN, BS and SABS.

LIFTING LUGS: Valves have lifting lugs/holes sized and located for safe hoisting of valve assembly.

BODY LINING (OPTIONAL): Unlined or Rubber.

MATERIAL CERTIFICATION: All vetted parts have certified chemical and physical test reports.

FEATURES

- Valve body can be lined.
- Seals in both directions.
- No blocking or leakage.
- Metal seated gate valve.
- Epoxy coated.
- Seats hydraulic pressed in the wedge.
- Seat ring out of flow when in open position.
- Rising and non-rising spindle.
- Back seat to re-pack gland packing under pressure.
- Closing direction: clockwise or anti-clockwise.
- Full bore with low head-loss characteristics.
- Lifting Lugs.


ACTUATORS

All types of actuators can be fitted, electric, gearbox, hydraulic, pneumatic or handwheel.

VALVE DESIGN

The Valve is a metal sealed wedge gate valve manufactured to SABS 664 standards. Suitable for isolation and scouring purposes.

DIMENSIONS AND WEIGHTS

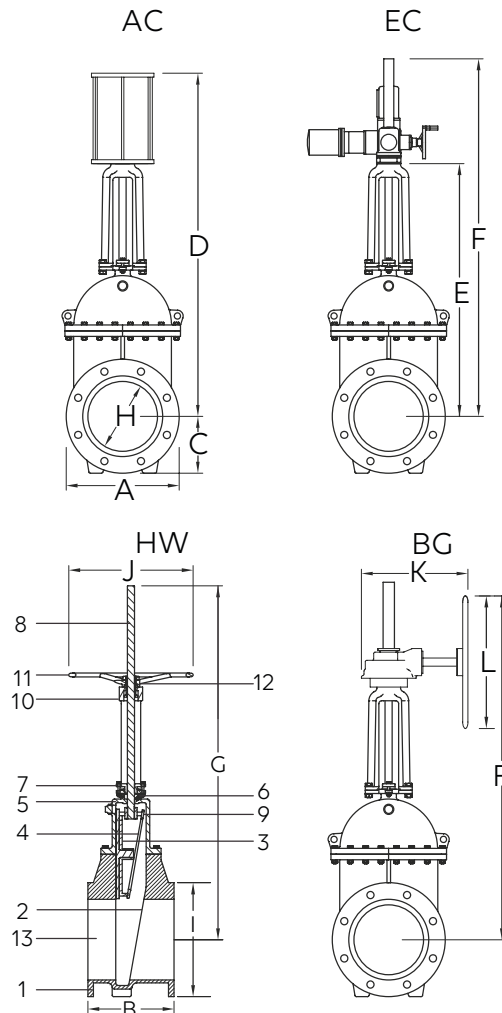

VALVE IN FULLY OPEN POSITION

APPLICATIONS

Mining and mineral processing.
Power generation.
Sand and gravel.
Chemical and soda ash.
Pulp and paper.
Environmental and effluent.
Dry feeds & powders.

ACCESSORIES

Limit switches.
Manual lock out option.
Bellow and stem protective cover.
Flushing Ports.

	PART	DESCRIPTION
1	Body	Cast SG Iron
2	Body Seat	Hydraulically pressed into wedge
3	Wedge Seat	Brass
4	Wedges	Cast SG Iron
5	Bonnet	Cast SG Iron
6	Packing	Graphite in Rope
7	Gland	Cast SG Iron
8	Spindle	Stainless Steel
9	Yoke Assembly	Mild Steel
10	Spindle Nut	Bronze
11	Handwheel	Cast SG Iron
12	Handwheel Nut	Carbon Steel
13	Body Lining	Rubber, Urethane or Ceramic

VALVE SIZE (mm)	A	F/F B	C	AC D	EC E	BG F	HW G	H	I	J	K	L	WEIGHT (kg)
50	170	216	85	559	300	370	5500	50	170	300	350	300	50
80	200	229	100	659	370	440	542	80	200	300	350	300	80
100	220	254	110	710	380	470	695	100	220	400	350	400	90
150	285	280	142	1003	610	661	900	150	285	500	350	400	90
200	340	317	170	1224	770	845	1104	200	340	500	350	400	100
250	405	356	202	1411	905	1014	1360	250	405	500	350	400	250
300	460	380	230	1615	1012	1120	1560	300	460	500	350	400	300
350	520	470	260	1745	1140	1230	1840	350	520	600	350	500	450
400	580	470	290	2016	1280	1355	1940	400	580	600	350	500	500
450	640	485	320	2300	1487	1600	2180	450	640	700	500	500	600

Contact Dual for larger sizes. Dimensions and weights are for guidance only - detailed dimension drawings available on request. All dimensions are in millimeters, unless stated.

CORPORATE HEADQUARTERS:
166 ROTTERDAM ROAD
(CNR ROTTERDAM ROAD & ANTWERP STREET)
APEX, BENONI, GAUTENG, SOUTH AFRICA

PO BOX 12520, BENORYN 1504
TEL: +27 11 422 4326/7
FAX: +27 11 421 7842
EMAIL: SALES@DUALVALVES.COM